

HOSE COUPLINGS RACCORDI PORTAGOMMA




- A complete range of hose couplings in black polypropylene.
- PP hose couplings are ideal for irrigation applications.
- Perfect sealing thanks to sharper barbs and precision thread finishing.
- Range: The range of threaded fittings includes sizes from 30 to 45 mm.

- Gamma completa degli accessori per tubi portagomma in polietilene negro.
- Questi raccordi sono ideali per applicazioni di irrigazione.
- Tenuta perfetta grazie alle zigrinature e alla precisa filettatura.
- La gamma comprende le dimensioni da 30 a 45 mm.

PP. 96. SP - CALOTTA PORTAGOMMA PP

Hose plug

Calotta portagomma

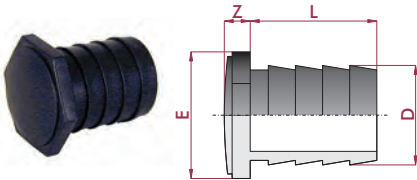

D	DN	RIF.	CODICE
30	25	11 96 030	01622
35	25	11 96 035	01623
40	32	11 96 040	01624
45	32	11 96 045	01625

L	Z	E
39	10	43
44	10	51
49	11	57
54	12	63


PP. 97. FTSP - PORTAGOMMA FILETTO PP

Hose coupling

•BSP female thread

Portagomma filetto

• Filetto femmina BSP

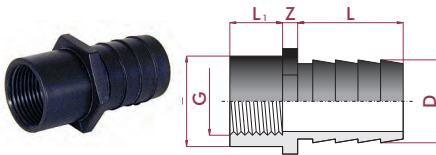

D x G	DN	RIF.	CODICE
30 x 1"	25	11 97 030	01618
35 x 1"	25	11 97 035	01619
40 x 1 1/4"	32	11 97 040	01620
45 x 1 1/4"	32	11 97 045	01621

L	L ₁	Z	E
39	22	6	43
44	22	7	51
49	22	7	57
54	27	8	63


PP. 98. MTSP - PORTAGOMMA FILETTO PP

Hose coupling

• BSP male thread

Portagomma filetto

• Filetto maschio BSP

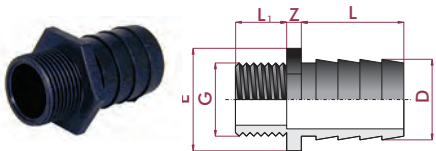


D x G	DN	RIF.	CODICE
30 x 1"	25	11 98 030	01614
35 x 1"	25	11 98 035	01615
40 x 1 1/4"	32	11 98 040	01616
45 x 1 1/4"	32	11 98 045	01617

L	L ₁	Z	E
39	19	6	43
44	19	7	51
49	22	7	57
54	27	8	63

PP. 99. SP - PORTAGOMMA FILETTO PP

Hose coupling

Manicotto portagomma



D	DN	RIF.	CODICE
30 x 30	25	25	01610
35 x 35	25	25	01611
40 x 40	32	32	01612
45 x 45	32	32	01613

L	Z	E
39	6	43
44	7	51
49	7	57
54	8	63

THREADED SERIES RACCORDI A FILETTO



- A complete range of threaded fittings in black polypropylene.
- PP threaded fittings are ideal for most industrial chemical and irrigation applications.
- Perfect sealing thanks to the precision thread finishing.
- Range. The range of threaded fittings includes sizes from 1/2" to 2".
- Working pressure: PN 10 (150 psi).

- Gamma completa di accessori filettati in polipropilene nero.
- Ideali per applicazioni nell'industria chimica o nell'irrigazione.
- Tenuta perfetta grazie alla precisa filettatura.
- La gamma comprende le dimensioni da 1/2" a 2".
- Pressione di lavoro: PN 10 (150 psi).


PP. 33. MTR - NIPPLO RIDOTTO PP

Reducing nipple

- BSP male x male thread

Nipplo ridotto

- Filetto maschio x maschio BSP



G x G ₁	DN	PN	RIF.	CODICE
3/4" x 1/2"	15	10	11 33 625	11740
1" x 3/4"	20	10	11 33 632	11742
1" x 1/2"	15	10	11 33 633	11741
1 1/4" x 1"	25	10	11 33 640	15884
1 1/2" x 1 1/4"	32	10	11 33 650	15885
2" x 1 1/2"	40	10	11 33 663	15886

L	L ₁	H	S
16	15	43	32
19	16	48	40
19	15	47	40
29	24	53	46
29	27	56	55
34	27	61	65


PP. 32. MFTR - NIPPLO RIDOTTO PP

Reducing nipple

- BSP male x female thread

Riduzione filettata

- Filetto maschio x femmina BSP



G x G ₁	DN	PN	RIF.	CODICE
3/4" x 1/2"	15	10	11 32 626	11743
1" x 3/4"	20	10	11 32 633	11745
1" x 1/2"	15	10	11 32 634	11744
1 1/4" x 1"	25	10	11 32 640	15887
1 1/2" x 1 1/4"	32	10	11 32 650	15888
2" x 1 1/2"	40	10	11 32 663	15889

L	L ₁	H	S
16	18	43	32
19	19	48	36
19	18	47	36
27	25	52	46
26	25	55	51
30	25	65	65


PP. 18. MT - NIPPLO PP

Nipple

- BSP male x male thread

Nipplo

- Filetto maschio x maschio BSP



G	DN	PN	RIF.	CODICE
1/2" x 1/2"	15	10	11 18 620	11734
3/4" x 3/4"	20	10	11 18 625	11735
1" x 1"	25	10	11 18 632	11736
1 1/4" x 1 1/4"	32	10	11 18 640	15878
1 1/2" x 1 1/2"	40	10	11 18 650	15879
2" x 2"	50	10	11 18 663	15880

L	H	S
14	40	27
16	44	32
19	51	36
21	55	46
21	56	55
26	66	65


PP. 19. CAP - TAPPO PP

Plug

- BSP male thread

Tappo

- Filetto maschio BSP



G	DN	PN	RIF.	CODICE
1/2"	15	10	11 19 620	11737
3/4"	20	10	11 19 625	11738
1"	25	10	11 19 632	11739
1 1/4"	32	10	11 19 640	15881
1 1/2"	40	10	11 19 650	15882
2"	50	10	11 19 663	15883

L	H	S
14	28	27
16	30	32
19	34	36
21	39	46
21	40	55
26	45	65

SPIRAL BARB FITTINGS CONNESSIONI SB




- High quality and reliability have made Cepex spiral barb fittings the preferred choice for irrigation applications.
- Engineered to provide a better grip and ease of installation.
- Special spiral barb allows "twist-on" connection of hose without need for glue or clamping.
- Hard polypropylene thermoplastic material for sharper barbs, strength, durability and chemical resistance.
- 6 models available:
SBE - Elbows (1/2" & 3/4")
SBA - Male adaptors (1/2" & 3/4")
SBC - Coupling
SBT - Tee
- Operating pressure: up to 6 bar (90 psi).
- Available with BSP (standard) or NPT threads (upon request).

- L'elevata qualità ed affidabilità delle connessioni SB Cepex ne hanno fatto l'opzione perfetta per applicazioni di irrigazione.
- Progettate per offrire un migliore utilizzo ed una facilità di installazione.
- Le striature speciali permettono una connessione "twist-on" senza necessità di incollaggi o fascette.
- Realizzate in polipropilene per una migliore durata e resistenza chimica.
- 6 modelli disponibili:
SBE - Gomito (1/2" & 3/4")
SBA - Adattatore maschio (1/2" & 3/4")
SBC - Manicotto
SBT - Ti
- Pressione di servizio: fino a 6 bar (90 psi).
- Disponibili con filetto BSP (standard) o NPT (su richiesta).

PP. 01. SBE - TI SB IN PP

Spiral barb elbow

Gomito filetto maschio - portagomma




D x G	DN	PN	RIF.	CODICE
13,8 x 1/2"	9	5,5	11 01 720	21948
13,8 x 3/4"	9	5,5	11 01 725	21949

L	L ₁
45	34
45	34

PP. 05. SBA - MANICOTTO SB IN PP

Spiral barb adaptor

Manicotto filetto maschio - portagomma

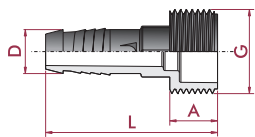

D x G	DN	PN	RIF.	CODICE
13,8 x 1/2"	9	5,5	11 05 720	28670
13,8 x 3/4"	9	5,5	11 05 725	28671

L	A
54	15
54	15

PP. 05. SBC - PORTAGOMMA SB IN PP

Spiral barb coupling

Manicotto portagomma




D	DN	PN	RIF.	CODICE
13,8x13,8	9	5,5	11 05 012	28672

L
55

PP. 03. SBT - TI SB IN PP

Spiral barb tee

Ti portagomma



D	DN	PN	RIF.	CODICE
13,8x13,8x13,8	9	5,5	11 03 012	28673

L	L ₁
70	35

IRRIGATION FITTINGS

ACCESSORI IRRIGAZIONE



Poly cut-off riser

- It allows the adjustment of sprinklers at the ground level.
- Could be cut in different sizes.
- Flexible polypropylene thermoplastic material offering strength, durability and chemical resistance.
- Male threads available in several sizes.
- Working pressure: PN 6 (90 psi).

Assembly tee

- Self-Aligning manifold tee.
- Manifold tees go together to make a manifold (eg. electric valves).
- Fast and easy assemble by hand without special tools.
- Durable one-piece construction assures water-tight joints and long life.
- Non-corrosive, full-flow construction minimizes friction loss.
- Hard polypropylene thermoplastic material offering strength, durability and chemical resistance.
- Working pressure: PN 10 (150 psi).
- O-ring in NBR.

Prolunga

- Permette di adattare i diffusori e gli irrigatori al corretto livello del terreno.
- Può essere tagliata in differenti altezze.
- Fabbricata in polipropilene flessibile per una migliore resistenza, durata e comportamento chimico.
- Filetti disponibili in differenti misure.
- Pressione di lavoro: PN 6 (90 psi).


Ti assembly

- Ti collettore auto-allineante.
- Unione di vari ti per realizzare un collettore (es. per elettrovalvole).
- Montaggio semplice e rapido senza necessità di particolari attrezzi.
- Costruzione in un sol pezzo dotata di guarnizione che assicura tenuta e lunga durata.
- Resistente alla corrosione, la sua forma assicura una ridotta perdita di carico.
- Fabbricata in polipropilene rigido per una migliore resistenza, durata e comportamento chimico.
- Pressione di lavoro: PN 10 (150 psi).
- O-ring in NBR.

PP. 52. IRR - PROLUNGA IN PP

Poly cut-off riser

Prolunga




G x G ₁	DN	PN	RIF.	CODICE
1/2" x 1/2"	14	6	11 52 620	09660
3/4" x 1/2"	14	6	11 52 624	09661
3/4" x 3/4"	19	6	11 52 625	09662

L	L ₁	H
123	16	145
123	21	150
115	23	148

PP. 43. IRR - TI ASSEMBLY IN PP

Tee for assembly

Ti assembly



G	DN	PN	RIF.	CODICE
3/4"	20	10	11 43 625	21732
1"	22	10	11 43 632	18566

L	Z	L ₁
120	49	49
140	49	48